

## Cordless DECT IP Multi-Cell System

The Yealink W90 DECT IP Multi-Cell System, consisting of two elements - a base station W90B and a DECT Manager W90DM, is designed to provide the organizations who require wireless coverage with the full ease of deployment. This DECT multi-cell system intends to create an extremely scalable and reliable solution for the organizations of any size and any shape. The system supports up to 250 handsets and 250 simultaneous calls, which ensures one call in each handset, and allows you to get rid of the limited wireless signal coverage of only one base station. Meanwhile, the system can work with Yealink W53H, W56H, W59R, CP930W, and DD Phone with seamless roaming and handover of the calls, making freely mobile communication in and between each zone achievable. Both W90B and W90DM join the modern, compact design with Yealink HD voice quality, which is wrapped with the full-duplex technology Opus, that setting free your ears and giving you an elaborate audio experience.



Up to 60 Base Stations



Compatible with Multiple Devices



DECT/SRTP/TLS



Auto-P



Cloud Contact/LDAP/XML/XSI




HD Audio



Wall Mountable



External Antenna

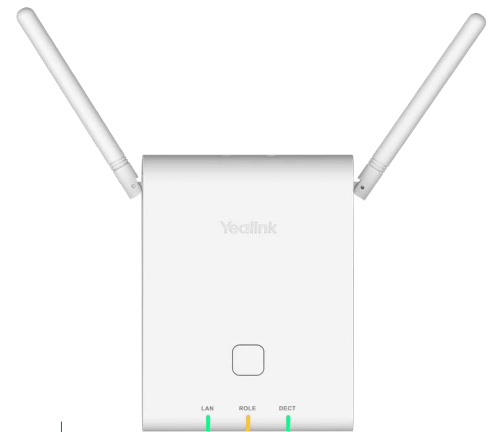

## Key Features and Benefits

### Seamless Stability

The Yealink W90 DECT IP Multi-Cell System brings seamless stability. The rotatable external antennas ensure further signal range, industry-leading coverage, and flexible steering for complex areas, which truly saves amount and cost of bases in deployment with industry-leading coverage. Moreover, the Lan Sync guarantees stable roaming even in poor signal transmission environment or strong signal interference like warehouses with overcrowded cargos or several iron gates.

### Easy Deployment

The Yealink W90 DECT IP Multi-Cell System provides easier and faster setup for users: the DECT Deployment Toolkit for quick base location, IP discovery tool for quickly getting IP of DM, and auto sync level for self-organizing network without manual operation. Instead of complex steps, it takes less time from deployment to daily management for large system.

### Wide Coverage

Available for 1DM, 60 bases, 250 handsets and 250 parallel calls, the Yealink W90 DECT IP Multi-Cell System is tailored for large space and multi-locations & bases, delivering unified communicating solution especially for warehouses, hospitals, hotels, supermarkets chains, cruises, authorized car dealerships, offices, retail formats, etc. Virtual machines and more bases will be supported in the future, boarding the coverage once more.

### Full Scenarios

The Yealink W90 DECT IP Multi-Cell System supports various devices: W53H, W56H, W59R, CP930W, DD Phone, which definitely matches different employee roles and full scenes communicating demand from mobile, desk to conference with flexible scalability.

### Multiple Phone Books

The Yealink W90 DECT IP Multi-Cell System offers easy access to multiple phone books, including Local Directory, Remote Phonebook, LDAP, and XML Phonebook. Additionally, it is broadly compatible with PBX contacts.

- Support Air and LAN synchronization
- Seamless handover and roaming
- Up to 60 base stations
- Up to 250 handsets
- Up to 250 SIP accounts
- Up to 250 parallel calls
- Support XML/LDAP/Remote Phonebook
- Support XSI Directory/XSI Call Log
- External antenna, DECT radio coverage up to 50m indoors and 300m outdoors
- DECT technology:  
Yealink DECT technology is based on CAT-  
iq2.0, which focuses on high-quality Audio  
VoIP (wideband), and low-bitrate data ap-  
plications. But we are not compatible with  
any third-party DECT devices (base station,  
handset, etc.).
- Support Opus
- Support SRTP / SIPS / TLS, LDAP(s) and  
HTTPS
- Support PoE
- Compatible with Yealink W59R/W56H/W53H,  
CP930W and DD Phone

### Phone Features

- Sync over the DECT and LAN (Seamless handover and roaming)
- Each Multicell System
  - Up to 60 base stations
  - Up to 250 handsets
  - Up to 250 VoIP accounts
  - Up to 250 simultaneous calls
  - Up to 8 WB (4 active handsets) calls per base
  - Up to 8 NB calls per base
- Up to 2 simultaneous calls per handset
- Call hold, call transfer, 3-way conference
- Switching between calls
- Call waiting, mute, silence, DND
- Caller ID with name and number
- Anonymous call, Anonymous call rejection
- Call forward (always/busy/no answer)
- Speed dial, voicemail, redial
- Message Waiting Indication (MWI)
- Music on hold (server-based)
- Local phonebook for up to 100 entries per handset
- Remote phonebook/LDAP/XML phonebook
- Phonebook search/import/export
- Call history (all/misplaced/received)
- Reset to factory, reboot
- Keypad lock, emergency call
- Broadsoft directory, BroadSoft call log
- Broadworks feature key synchronization
- Shared Call Appearance (SCA)
- XML browser
- IPUI registration
- User access level

### Management

- Auto-provision via TFTP/FTP/HTTP/HTTPS/RPS
- Auto-provision with PnP
- Handset upgrade: OTA (Over-The-Air)
- Configuration: browser/phone/auto-provision
- Trace package and system log export

### Audio Features

- Full-duplex speakerphone
- Hearing Aid Compatibility (HAC) compliant
- DTMF
- Wideband codec: Opus, AMR-WB (optional), G.722
- Narrowband codec: AMR-NB (optional), PC-MU, PCMA, G.726, G.729, iLBC
- VAD, CNG, AGC, PLC, A/B

### Network Features

- SIP v1 (RFC2543), v2 (RFC3261)
- SNTP/NTP
- VLAN (802.1Q and 802.1P)
- 802.1x, LLDP
- STUN Client (NAT Traversal)
- UDP/TCP/TLS
- IP assignment: static/DHCP
- Support outbound proxy server backup

### Security

- Open VPN
- Transport Layer Security (TLS1.0/TLS1.1/TLS1.2)
- HTTPS (server/client), SRTP
- Digest authentication
- Secure configuration file via AES encryption
- Support SHA256/SHA512/SHA384

### DECT

- Frequency bands:
  - 1880 – 1900 MHz (Europe), 1920 – 1930 MHz (US)
- DECT Standards: CAT-iq2.0

### Interface

- 1 x RJ45 10/100M Ethernet port
- Power over Ethernet (IEEE 802.3af), Class 1


### Physical Features

- Indoor Range: 30m~50m (The ideal distance is 50m)
- Outdoor Range: 300m (in ideal conditions)
- Wall mountable
- Three LED indicators on W90DM/W90B:
  - 1 x LAN (Power Indicator & Network Status) LED
  - 1 x Role LED
  - 1 x DECT LED
- External Yealink AC adapter: AC 100-240V Input and DC 5V/1.2A Output
- Color: Pearl White
- Dimension: 134mm x 100mm x 28mm
- Operating humidity: 10~95%
- Operating temperature: 0~+40°C (+32~104°F)

### Package Features

- Package contents:
  - W90DM/W90B
  - Expansion Screws
  - Quick Start Guide
  - Power Adapter (optional)
- Qty/CNT: 10 PCS
- Giftbox size: 158 mm x 203 mm x 63 mm
- Carton meas: 420 mm x 338 mm x 167 mm
- N.W: 2.8kg
- G.W: 3.4kg

### Compliance

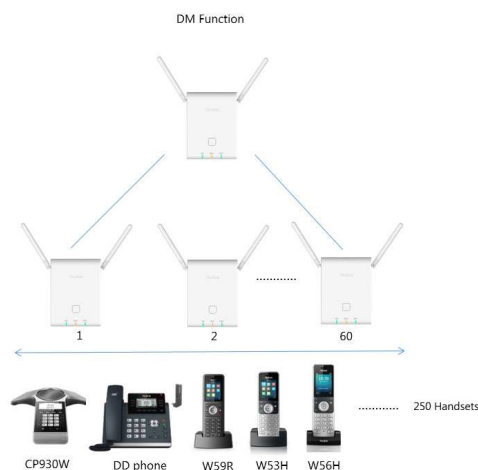

## About Yealink

Yealink is a global leading provider of enterprise communication and collaboration solutions, offering video conferencing service to worldwide enterprises. Focusing on research and development, Yealink also insists on innovation and creation. With the outstanding technical patents of cloud computing, audio, video and image processing technology, Yealink has built up a panoramic collaboration solution of audio and video conferencing by merging its cloud services with a series of endpoints products. As one of the best providers in more than 140 countries and regions including the US, the UK and Australia, Yealink ranks No.1 in the global market share of SIP phone shipments.

## Copyright

Copyright © 2020 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.

Copyright © 2020 Yealink(Xiamen) Network Technology CO., LTD. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

## Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
Web: [www.yealink.com](http://www.yealink.com)  
Addr: No.1 Ling-Xia North Road, High Tech Park,  
Huli District, Xiamen, Fujian, P.R.C  
Copyright©2020 Yealink Inc. All right reserved.